

TECHNICAL DATA SHEET • SPECIFICATIONS


RECESSED ACCESS DOOR WITH DRYWALL BEAD FLANGE

Hex head cam latch, piano hinge

AHA-GYP-00

INSTALLATION

Technical drawing AHA-GYP-00

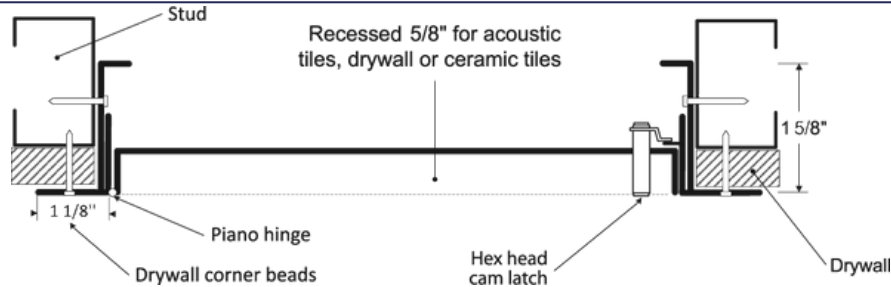


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8 x 8	203 x 203	1	3.6	1.6
12 x 12	304 x 304	1	6.2	2.8
16 x 16	406 x 406	1	9.2	4.2
18 x 18	457 x 457	1	11.1	5.0
24 x 24	609 x 609	1	18.2	8.3

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

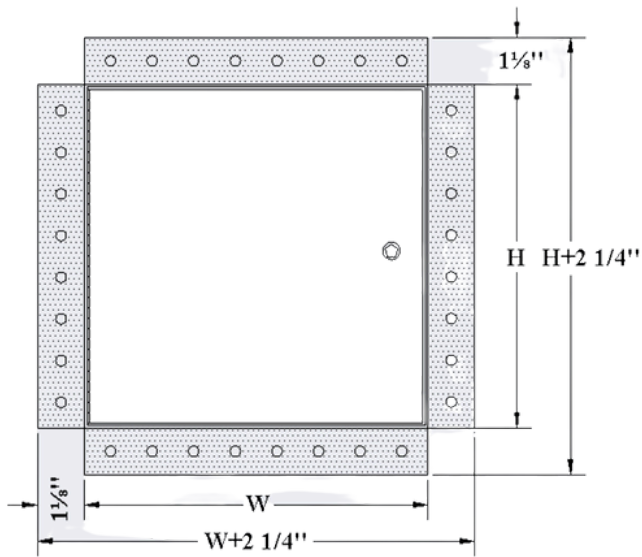

DESCRIPTION AND MATERIAL SPECIFICATION

Material	16 gauge cold rolled steel
Hinge	Continuous piano hinge, located on the second dimension (height)
Lock / Latch	Allen hex head cam latch. Requires a standard allen key to open the access door
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box
Flange	22-gauge galvanized steel, 1 1/8" drywall bead flange
Frame	1 5/8" in depth, made of cold rolled steel

POPULAR OPTIONS

For complete list of options go to [cendrex.com](https://www.cendrex.com)

Lock / Latch	Key-operated cylinder cam latch* (-10), screwdriver-operated cylinder cam latch (-220)
Material	Stainless steel (SS)
Recess	1/2" to 3/4" (standard 1 5/8" frame) 13/16" to 1 1/2" (special 2 1/2" frame)

*Maximum recess 3/4"



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:
(Signature or stamp)

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

cendrex
Made in Canada


Last updated: June 10, 2023


514-493-1489 | 1-800-479-1489
info@cendrex.com | [cendrex.com](https://www.cendrex.com)


OPTIONS


This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.


LOW SECURITY LOCKING MECHANISM


-  ☐ **35** Screwdriver operated cam latch

-  ☐ **220** Screwdriver operated cylinder Cam latch


-  ☐ **80** Ring/tool key operated slam latch


-  ☐ **55** Hex head slam latch and ring key operated slam latch


-  ☐ **30** Slide latch


-  ☐ **50** Allen hex head cam latch


HANDLES


-  ☐ **25** WITH KEY - 4" handle and key operated cam latch

-  ☐ **100K** Key-operated recessed handle cam latch with cap over key path


-  ☐ **20** WITHOUT KEY - 4" handle operated cam latch


-  ☐ **22** WITHOUT KEY - 4" handle operated slam latch


-  ☐ **21** WITHOUT KEY Fixed 4" handle


-  ☐ **26** WITHOUT KEY - L handle


MEDIUM SECURITY LOCKING MECHANISM



-  ☐ **10** Key-operated cylinder cam latch

-  ☐ **15** Mortise cam latch preparation
15C Mortise cam latch preparation, keyed differently
15CKA Mortise cam latch preparation, keyed alike


-  ☐ **85** Mortise slam latch


-  ☐ **85C** Mortise slam latch with cylinder
85CKA Mortise slam latch cylinder keyed alike


-  ☐ **90** Pinned hex head cam latch


-  ☐ **C** Cylinder cam latch, keyed differently
-  ☐ **CKA** Cylinder cam latch, keyed alike

MATERIALS


-  ☐ **GS** Galvanneal steel


-  ☐ **AL** Aluminum


-  ☐ **SS** Stainless steel


-  ☐ **CR** Cold rolled steel


HIGH SECURITY LOCKING MECHANISM


-  ☐ **40** Mortise deadbolt lock

-  ☐ **40C** Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA Mortise deadbolt lock with cylinder, keyed alike


-  ☐ **99** Inside release thumbturn for mortise deadbolt lock


-  ☐ **45** Mortise preparation for detention deadbolt lock


-  ☐ **46** Detention deadbolt lock

-  ☐ **47** CIDetention deadbolt Key

OTHERS

-  ☐ **60** Gasket

-  ☐ **160** Holding cable

-  ☐ **240** Masonry anchors