

TECHNICAL DATA SHEET • SPECIFICATIONS


FLUSH UNIVERSAL ACCESS DOOR WITH MAGNETIC CLOSING

Concealed magnets, concealed double-arm hinge

CTR-MAG

INSTALLATION

Technical drawing CTR-MAG

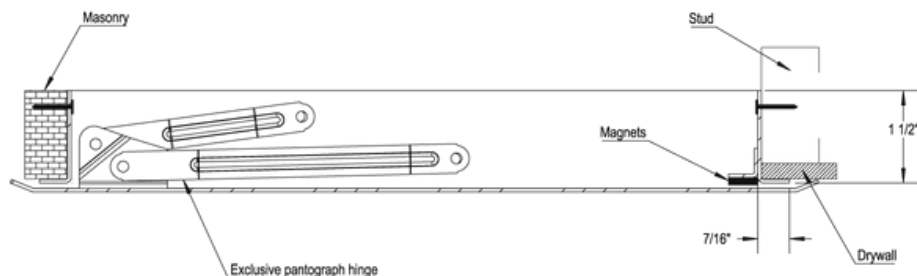


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Number of locks	Weight	
inches	mm		lbs	KG
8.25 x 8.25	210 x 210	1	3.8	1.7
8.25 x 12	210 x 305	1	5.0	2.3
10 x 10	254 x 254	1	4.8	2.2
12 x 12	305 x 305	1	6.1	2.8
12 x 18	305 x 457	1	8.4	3.8
14 x 14	356 x 356	1	7.5	3.4
16 x 16	406 x 406	1	9.0	4.1
18 x 18	457 x 457	3	10.9	4.9
18 x 24	457 x 610	3	13.5	6.1
20 x 20	508 x 508	3	12.8	5.8
22 x 22	559 x 559	3	15.0	6.8
22 x 30	559 x 762	4	19.0	8.6
22 x 36	559 x 914	5	22.2	10.1
24 x 24	610 x 610	3	16.9	7.7
24 x 30	610 x 762	5	21.2	9.6
24 x 36	610 x 914	5	23.6	10.7

Your odd sizes: Made in 5 days

Rough wall opening is door size + 1/4" or + 6 mm

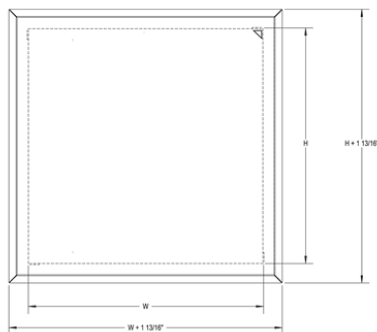

PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

DESCRIPTION AND MATERIAL SPECIFICATION

Material	16-gauge cold-rolled steel
Hinge	Concealed, exclusive pantograph double-arm design hinge, located on the second dimension (height)
Lock / Latch	Concealed magnets
Finish	High quality white powder coat primer
Packaging	Individually wrapped, 1 door per box

POPULAR OPTIONS

For complete list of options go to cendrex.com

Lock / Latch	Key-operated cylinder cam latch (-10), mortise cam latch preparation (-15, cylinder optional), hex head cam latch (-50)
Handle	4" handle-operated cam latch (-20), 4" handle and key operated cam latch (-25)
Material	Galvanneal steel (GS)
Other	Neoprene gasket (-60), holding cable (-160, for doors > 12" x 12")



OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



- ☐ **35**
Screwdriver operated
cam latch



- ☐ **220**
Screwdriver operated
cylinder Cam latch



- ☐ **80**
Ring/tool key operated slam
latch



- ☐ **55**
Hex head slam latch and ring key
operated slam latch



- ☐ **30**
Slide latch



- ☐ **50**
Allen hex head cam latch

HANDLES



- ☐ **25**
WITH KEY - 4" handle and key
operated cam latch



- ☐ **100K**
Key-operated recessed handle
cam latch with cap over key
path



- ☐ **20**
WITHOUT KEY - 4" handle
operated cam latch



- ☐ **22**
WITHOUT KEY - 4" handle
operated slam latch



- ☐ **21**
WITHOUT KEY
Fixed 4" handle



- ☐ **26**
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



- ☐ **10**
Key-operated cylinder
cam latch



- ☐ **15**
Mortise cam latch preparation
15C
Mortise cam latch preparation,
keyed differently
15CKA
Mortise cam latch preparation,
keyed alike



- ☐ **85**
Mortise slam latch



- ☐ **85C**
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder
keyed alike



- ☐ **90**
Pinned hex head cam latch



- ☐ **C**
Cylinder cam latch,
keyed differently



- ☐ **CKA**
Cylinder cam latch,
keyed alike

MATERIALS



- ☐ **GS**
Galvanneal steel



- ☐ **AL**
Aluminum



- ☐ **SS**
Stainless steel



- ☐ **CR**
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



- ☐ **40**
Mortise deadbolt lock



- ☐ **40C**
Mortise Deadbolt Lock with
Cylinder, keyed differently



- ☐ **40CKA**
Mortise deadbolt lock with
cylinder, keyed alike



- ☐ **99**
Inside release thumbturn for
mortise deadbolt lock



- ☐ **45**
Mortise preparation for
detention deadbolt lock



- ☐ **46**
Detention deadbolt lock



- ☐ **47**
CIDetention deadbolt Key

OTHERS



- ☐ **60**
Gasket



- ☐ **160**
Holding cable



- ☐ **240**
Masonry anchors