
TECHNICAL DATA SHEET • SPECIFICATIONS

FIBERGLASS REINFORCED GYPSUM ACCESS DOOR
Rounded removable access door, for drywall ceiling

GFRG-POR

INSTALLATION

Technical drawing GFRG-POR

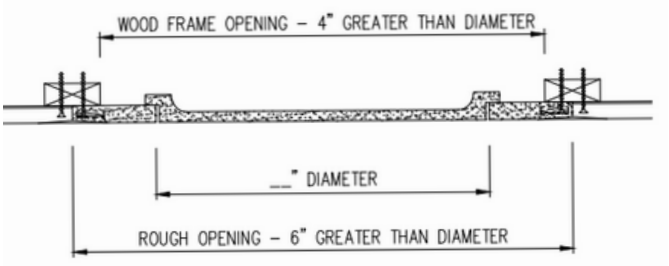


STANDARD DIMENSIONS AND APPEARANCE

Dimensions • W X H		Weight	
inches	**mm**	**lbs**	**KG**
9 x 9	229 x 229	6.0	2,72
12 x 12	304 x 304	8.0	3,63
16 x 16	406 x 406	10.0	4,54
18 x 18	457 x 457	11.0	5,00
24 x 24	609 x 609	16.0	7,26

Your odd sizes: Made in 15 days

Rough wall opening is door size + 6" or + 152 mm

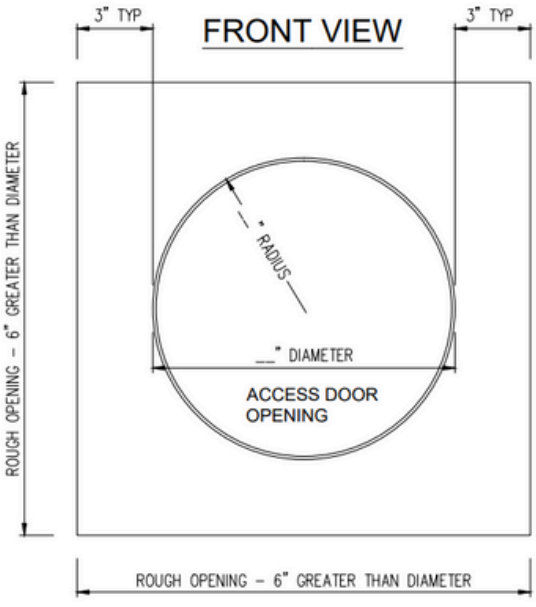

DESCRIPTION AND MATERIAL SPECIFICATION

Material	Lightweight fiberglass-reinforced gypsum
Hinge	No hinge. gravity based closure and removable door
Lock / Latch	None
Finish	Rounded corners (radius finish). To be primed and painted on site
Odd sizes available	Yes. Non-stocked doors manufactured in 15 business days.
Packaging	Individually wrapped, 1 access door per box

POPULAR OPTIONS
For complete list of options go to **cendrex.com**

Corners	Square corners, round door
Hinges	Presence of hinges
Lock / Latch	Cylinder, screwdriver latch
Gaskets	Neoprene gasket



PROJET DATA

Project:	Date:	QTY	W	H
Architech:				
Dealer:				
Contractor:				
Location:				

Tagging instructions:

Special instructions:

Options:

Submittal approval:
(Signature or stamp)

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

cendrex
Made in Canada

Last updated: March 11, 2024

514-493-1489 | 1-800-479-1489
info@cendrex.com | **cendrex.com**

TECHNICAL DATA SHEET • OPTIONS

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM



☐ **35**
Screwdriver operated cam latch



☐ **220**
Screwdriver operated cylinder Cam latch



☐ **80**
Ring/tool key operated slam latch



☐ **55**
Hex head slam latch and ring key operated slam latch



☐ **30**
Slide latch



☐ **50**
Allen hex head cam latch

HANDLES



☐ **25**
WITH KEY - 4“ handle and key operated cam latch



☐ **100K**
Key-operated recessed handle cam latch with cap over key path



☐ **20**
WITHOUT KEY - 4“ handle operated cam latch



☐ **22**
WITHOUT KEY - 4“ handle operated slam latch



☐ **21**
WITHOUT KEY
Fixed 4“ handle



☐ **26**
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM



☐ **10**
Key-operated cylinder cam latch



☐ **15**
Mortise cam latch preparation
15C
Mortise cam latch preparation, keyed differently
15CKA
Mortise cam latch preparation, keyed alike



☐ **85**
Mortise slam latch



☐ **85C**
Mortise slam latch with cylinder
85CKA
Mortise slam latch cylinder keyed alike



☐ **90**
Pinned hex head cam latch



☐ **C**
Cylinder cam latch, keyed differently

CKA
Cylinder cam latch, keyed alike

MATERIALS

☐ **GS**
Galvanneal steel



☐ **AL**
Aluminum



☐ **SS**
Stainless steel

☐ **CR**
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM



☐ **40**
Mortise deadbolt lock



☐ **40C**
Mortise Deadbolt Lock with Cylinder, keyed differently
40CKA
Mortise deadbolt lock with cylinder, keyed alike



☐ **99**
Inside release thumbturn for mortise deadbolt lock



☐ **45**
Mortise preparation for detention deadbolt lock



☐ **46**
Detention deadbolt lock



☐ **47**
ClDetention deadbolt Key

OTHERS



☐ **60**
Gasket



☐ **160**
Holding cable



☐ **240**
Masonry anchors

HEAD OFFICE
6500 Henri-Bourassa E. Blvd
Montreal QC H1G 5W9

Made in Canada

cendrex
Gives you access

Last updated: May, 14 2024
514 493-1489 | 1 800 479-1489
info@cendrex.com | **cendrex.com**